

COPPER

Copper Flat Discs are the standard tool for:

- OTR sidewall buffing
- Large repairs
- Conveyor belt repair
- Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats)
- Pre cured tread preparation
- Industrial rubber sheets buffing
- Horse hoof grinding (with special open grit = HD Ø 115 x 2.5 mm)

FD Ø 230 x 2 mm, AH 22 mm	Ø 9 1/4" Art. No: 132113-xx*
FD Ø 200 x 2 mm, AH 22 mm	Ø 8" Art. No: 132112-xx
FD Ø 175 x 2 mm, AH 22 mm	Ø 7" Art. No: 132111-xx
FD Ø 175 x 2 mm, AH 22 mm, Vented	Ø 7" Art. No: 132117-xx (Grit 14-46 only)
FD Ø 125 x 2 mm, AH 22 mm	Ø 5" Art. No: 132110-xx
FD Ø 115 x 2.5 mm, AH 22 mm	Ø 4 5/8" Art. No: 132114-xx
HD Ø 115 x 2.5 mm, AH 22 mm	Ø 4 5/8" Art. No: 132114-OG
FD Ø 102 x 1.5 mm, AH 22 mm	Ø 4" Art. No: 132109-xx



Various Flat Discs with AH 22 mm


FD Ø 175 x 2 mm, Ø 7"

FD Ø 175 x 2 mm, Ø 7",
Vented, Grit 18

* to be discontinued

STEEL SHOT GRIT

FD Ø 175 x 2 mm, AH 22 mm	Ø 7" Grit 230	Art. No: 932111-230
FD Ø 175 x 2 mm, AH 22 mm	Ø 7" Grit 390	Art. No: 932111-390
FD Ø 125 x 2 mm, AH 22 mm	Ø 5" Grit 230	Art. No: 932110-230
FD Ø 125 x 2 mm, AH 22 mm	Ø 5" Grit 390	Art. No: 932110-390
FD Ø 102 x 2 mm, AH 22 mm	Ø 4" Grit 230	Art. No: 932109-230
FD Ø 102 x 1.5 mm, AH 22 mm	Ø 4" Grit 390	Art. No: 932109-390

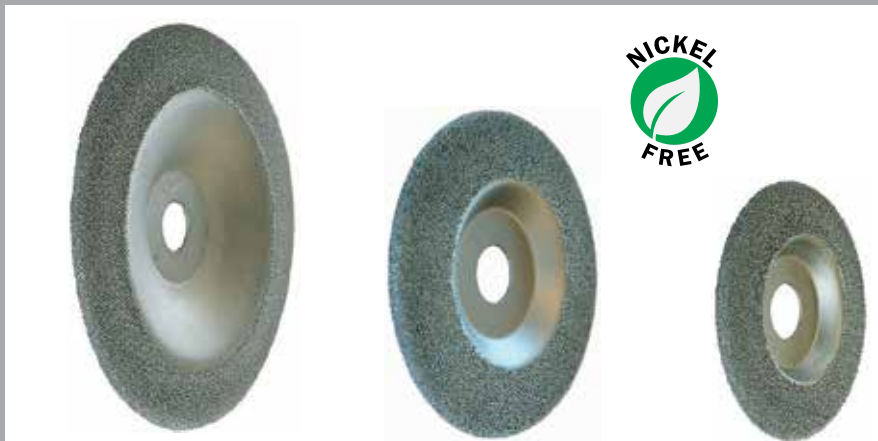

FD Ø 175 x 2 mm,
AH 22 mm Ø 7"

FD Ø 125 x 2 mm,
AH 22 mm Ø 5"

FD Ø 102 x 1.5 mm,
AH 22 mm Ø 4"

Steel Shot Grit Flat Discs are best suited for sensitive buffing jobs:

- OTR sidewall buffing
- Large repairs
- Conveyor belt repair
- Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats)
- Pre cured tread preparation
- Industrial rubber sheets buffing

PATRIOT



Patriot Flat Discs are the most economic tools for:

- OTR sidewall buffing
- Large repairs
- Conveyor belt repair
- Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats)
- Pre cured tread preparation
- Industrial rubber sheets buffing

FDP Ø 175 x 2.5 mm, AH 22 mm
 FDP Ø 125 x 2.5 mm, AH 22 mm
 FDP Ø 102 x 2 mm, AH 16 mm

Ø 7"
 Ø 5"
 Ø 4"

Art. No: 132400-xx
 Art. No: 132401-xx
 Art. No: 132402-xx



FDP Ø 175 x 2.5 mm
 AH 22 mm Ø 7"

FDP Ø 125 x 2.5 mm
 AH 22 mm Ø 5"

FDP Ø 102 x 2 mm
 AH 16 mm Ø 4"


Profile view

SUPER PATRIOT

FDSP Ø 175 x 2.5 mm, AH 22 mm
 FDSP Ø 125 x 2.5 mm, AH 22 mm

Ø 7"
 Ø 5"

Art. No: 133400-xxx
 Art. No: 133401-xxx



FDSP Ø 175 x 2.5 mm,
 AH 22 mm Ø 7"

FDSP Ø 125 x 2.5 mm,
 AH 22 mm Ø 5"

All B&J Flat Discs are perfect for repairing conveyor belts or OTR tires.

